

MRAC

MINI RACK COOLER KØLING SERVER & SWITCHE

OUTDOOR UNIT



INDOOR UNIT



Omgivelser: 30°C / 30 % r.h. - Tude = 35°C

RACK KØLER		MRAC 0035	MRAC 0035b	MRAC 0070	MRAC 0070i		
					@30Hz	@60Hz	@90Hz
Kølekapacitet	kW	3.6	4.1	6.8	3.1	5.9	7.3
SHR	-	1.00	1.00	1.00	1.00	1.00	1.00
Luftmængde	m ³ /h	915	1330	1330	1330		
Ventilator effekt	kW	0.15	0.33	0.33	0.33		
Strømforsyning	V/-Hz	230/1/50	230/1/50	230/1/50	230/1/50-60		
Dimensioner BxHxD	mm	485 x 300 x 600	485 x 300 x 600	485 x 300 x 600	485 x 300 x 600		
Vægt	kg	26	26	29,5	29.5		

UDEDEL		MTC 0035	2xMTC 0035*	MTC 0070	MTCi 0070		
					@30Hz	@60Hz	@90Hz
Total power input	kW	1.1	1.1	2.1	0.7	1.3	2.0
Total strømforbrug	A	4.7	4.7	4.2	3.8	7.1	11.3
Kølekredse	-/-	1/1	1/1	1/1	1/1		
Maks lydniveau; Q = 2*	dB(A)	42	42	46	42		
Strømforsyning	V/-Hz	230/1/50	230/1/50	400/3/50	230/1/50-60		
Dimensioner BxHxD	mm	700 x 540 x 265	700 x 540 x 265	942 x 735 x 341	1305 x 648 x 420		
Vægt	kg	34	34	71	91		

*@2m ii henhold til UNI EN 3744

**1 udedel i drift

MINI RACK COOLER FOR HIGH DENSITY SYSTEMS

MRAC




3.6 - 7.3 kW


MRAC

MINI RACK COOLER KØLING SERVER & SWITCHES

- MRAC KAN INSTALLERES I ALLE 19" RACK

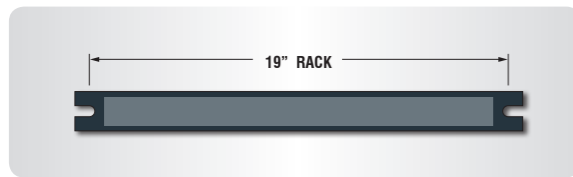

- SMALL DIMENSIONS: MRAC IS AS HIGH AS 7 RACK UNITS

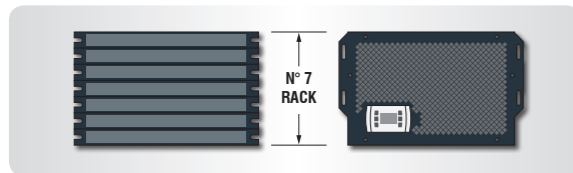


- MRAC'S FANS ARE EXCLUSIVELY WITH EC MOTORS




ELECTRONICALLY COMMUTATED FANS

- HIGHEST REDUNDANCY WITH THE 2 MOTOCONDENSING UNIT SOLUTION

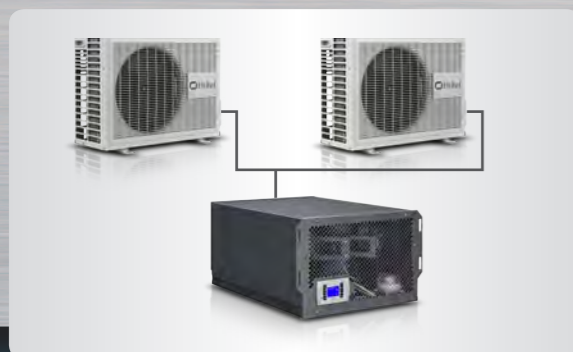

- MRAC IS SUITABLE FOR IN-RACK AIR CONDITIONING

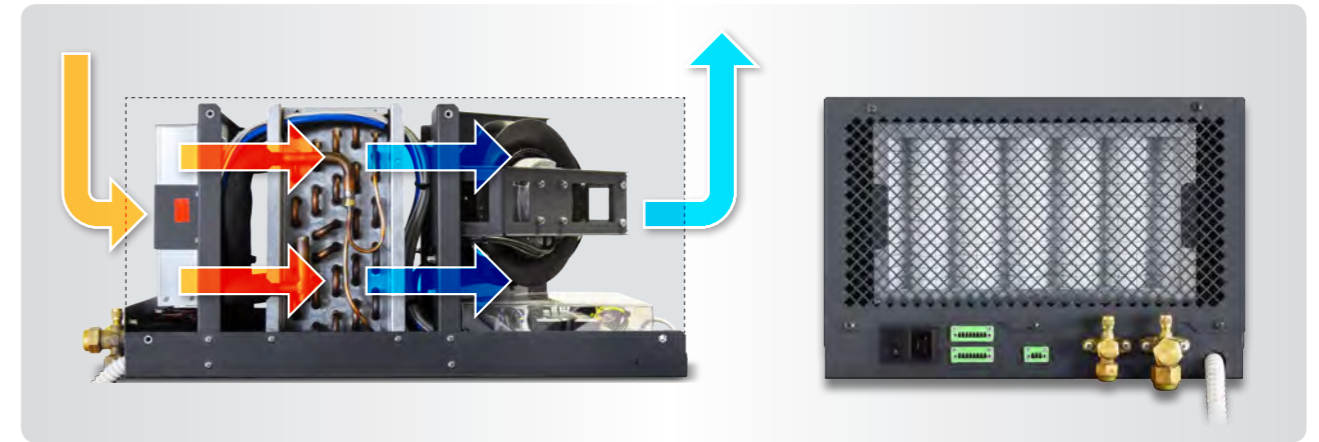

MRAC is the right choice to cool 19" racks which need a close temperature control and a 24h/24 operation. They come in split execution with an outdoor motocondensing R410A unit, from 3.6 up to 7.3 kW. MRAC is controlled by a dedicated software and can be connected in a LAN (up to 16 units). The main controller can be linked to an automatic system for door opening in case of alarm.

- » High efficiency cooling coil with hydrophilic treatment and structure made of aluminium
- » Brushless DC inverter driven compressor available for the 7 kW unit
- » Electrical and microprocessor quick connections
- » Low outdoor temperature version available
- » AISI 430 stainless steel drain pan
- » Refrigerant connections on bottom
- » Completely insulated panels
- » G3 air filter
- » Colour RAL 7016

